4.4 Baffle Installation for Osburn 1100 Insert

All firebrick and duraboard baffles must be properly in place for correct burning operation. Have any damaged firebricks replaced. Check the firebricks annually for damage and replace if they are broken or damaged. See Figure 4.2 for the firebrick layout. Install the side & back firebricks first, and then the bottom firebricks.

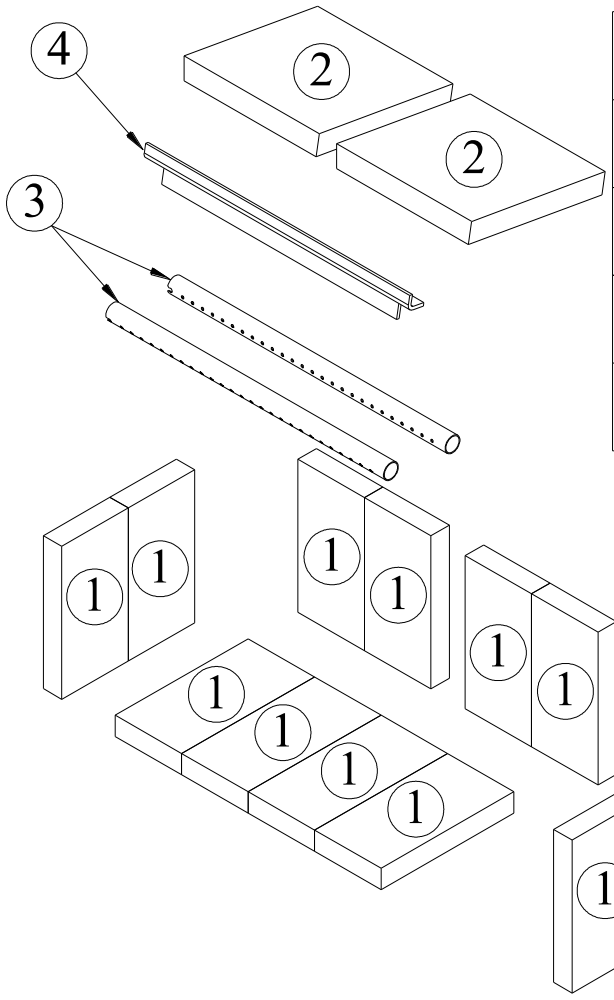

	DESCRIPTION	QTY
1	FIRE BRICKS 4.5" X 9"	12
2	VERMICULITE BAFFLE	2
3	SECONDARY AIR TUBES	2
4	FRONT BAFFLE SUPPORT	1

Figure 4.2 – Firebrick layout for Osburn 1100 Insert model

4.5 Secondary Air Tube Replacement