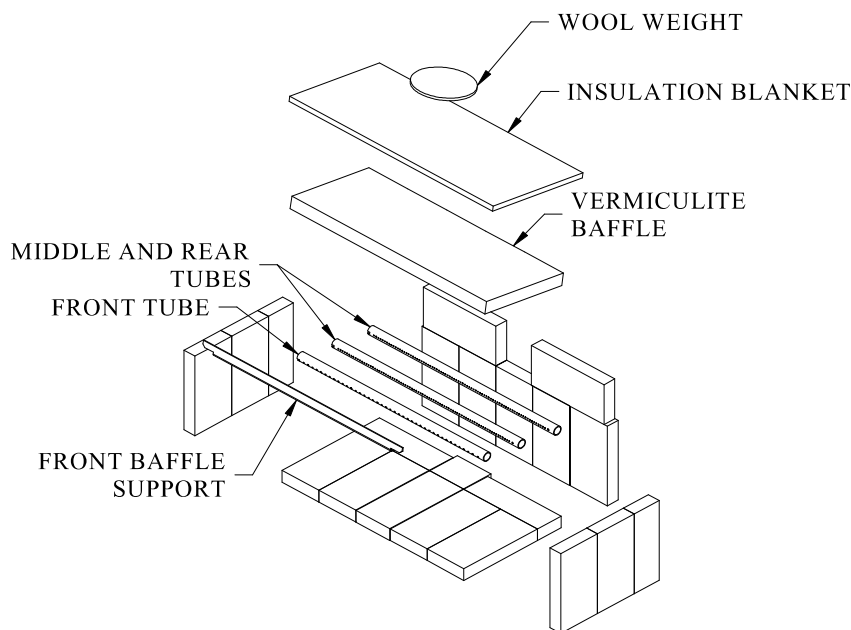
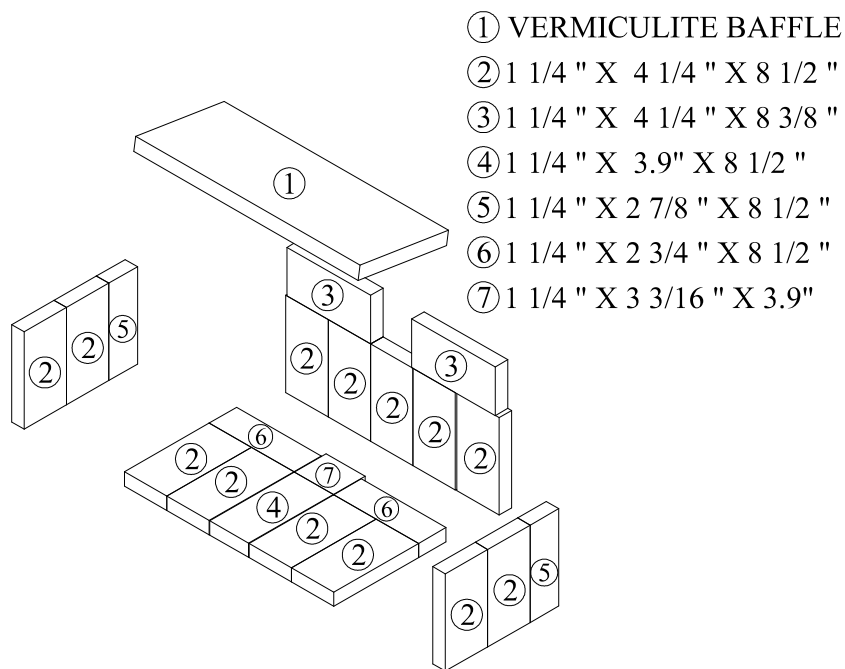


#### **4.4 Baffle Installation for XTD1.5-I**



**Figure 4.1 – Baffle installation & removal for XTD1.5-I**

All firebrick and vermiculite baffles must be properly in place for correct burning operation. Have any damaged firebricks replaced. Check the firebricks annually for damage and replace if they are broken or damaged. See Figure 4.2 for the firebrick layout. Install the side & back firebricks first, and then the bottom firebricks.



**Figure 4.2 – Firebrick layout for XTD1.5-I model**