

SNAP DISC #2 SAFETY SWITCH SRV7000-268

INSTALL INSTRUCTIONS

Replaces MPNs: SRV7000-268

Before Installing

- **ALWAYS** unplug the unit before beginning any work
 - Allow the unit to cool completely if recently used
 - Work in a well-lit area with proper tools
 - Ensure there are no pellets in the hopper assembly
-

Installation Steps

1. Unplug the unit
2. Open the right side service access panel of the stove or insert.
3. Locate snap disc #2 behind the service panel.
4. Disconnect the orange (from the) and black wires from the switch.
5. Unscrew the mounting screws on the switch to remove the switch from the unit.
6. Insert a new switch to the unit and fasten with screws.
7. Reconnect the orange and black wires to the switch on either of the terminals.
8. Close the service access panel.

Troubleshooting


To check if the snap disc #2 needs to be replaced:

1. Disconnect the orange and black wires from the switch and connect the two wires together with a jumper wire
2. Restart unit.

3. If the unit starts to feed, replace the switch.
4. If the unit does not start feeding after running for 2 minutes, test the switch with a multimeter for a normally closed position at room temperature, if you have continuity, the problem is not snap disc #2.

Refer to the [Troubleshooting Guide](#) for further details.

Diagram:

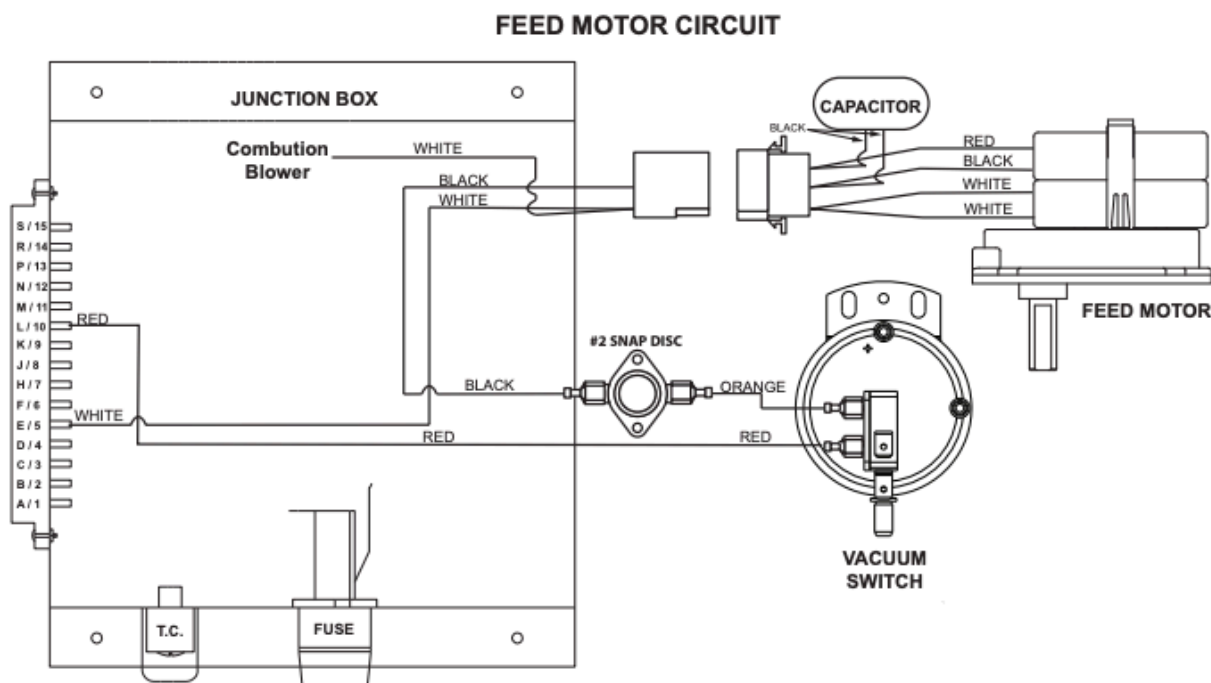

✓ Post-Installation Check

- Verify all connections are secure
- Ensure all wiring is not in proximity of moving parts
- Test motor operation before closing panels
- Check for any unusual noises or vibrations



Support

If you encounter any issues during installation, consult your owner's manual or contact technical support via our [contact form](#).