

CONTROL BOARD SRV7000-456

INSTALL INSTRUCTIONS

Replaces MPNs: SRV7000-456, SRV7000-330, SRV7000-323

Before Installing

- **ALWAYS** unplug the unit before beginning any work
 - Allow the unit to cool completely if recently used
 - Work in a well-lit area with proper tools
 - Ensure there are no pellets in the hopper assembly
-

Installation Steps

1. Unplug your stove from power.
2. Access and remove the rear wiring access panel. This may be located toward the back of the stove.
3. Carefully disconnect the connectors from the control board starting with the connections to the power supply (see diagram 2) . Ensure that you take note of the location of each connector on your board before disconnecting them.
4. Remove the screws holding the board in place to remove the old board.
5. Replace the old control board with the new control board. Fasten the new board in place with screws.
6. Reconnect all wires to the new control board (refer to diagrams 1 and 2).
7. Close the wiring access panel.
8. Plug in the stove and turn on to test. If there are issues with the unit upon start up please refer to the [Troubleshooting Guide](#).

Diagrams

Diagram 1:


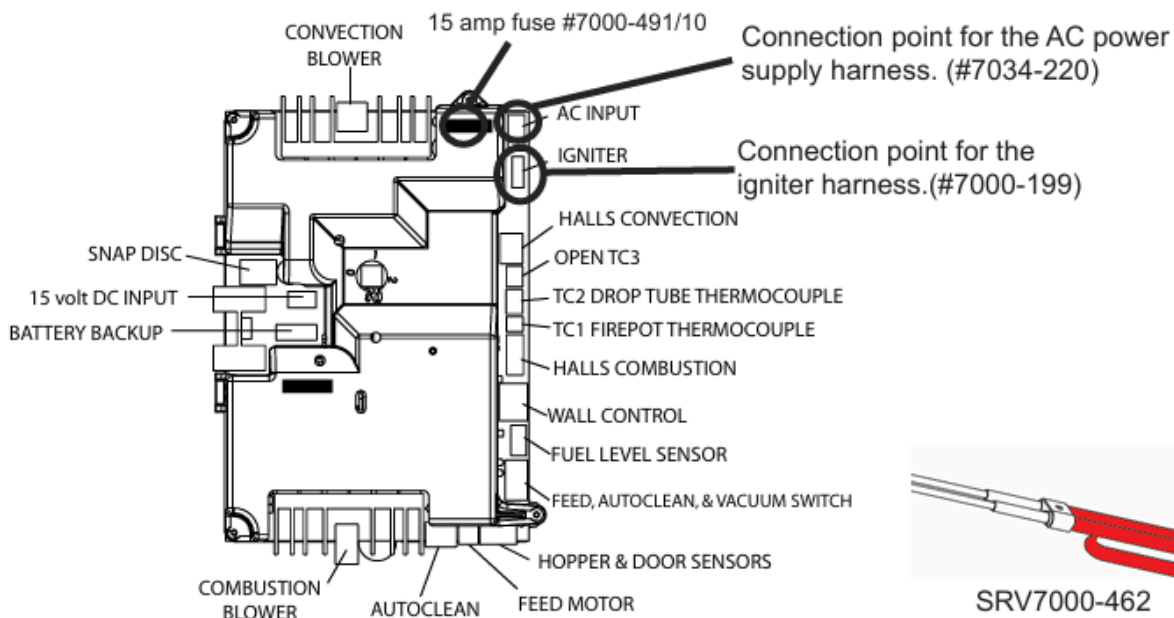


Diagram 2:

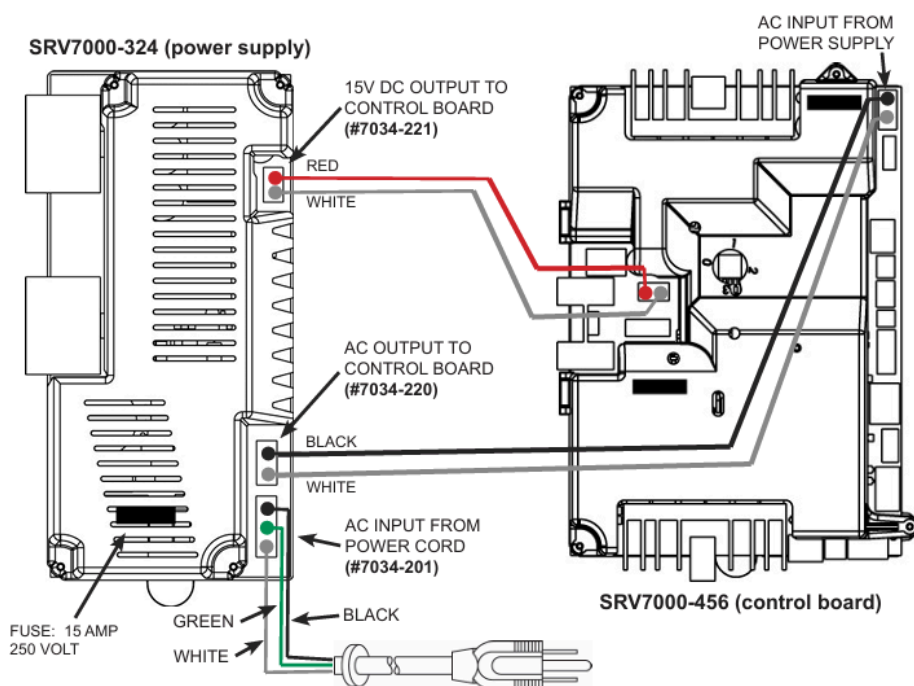

Post-Installation Check

- Verify all connections are secure
 - Ensure all wiring is not in proximity of moving parts
 - Test motor operation before closing panels
 - Check for any unusual noises or vibrations
-

Support

If you encounter any issues during installation, consult your owner's manual or contact technical support via our [contact form](#).