
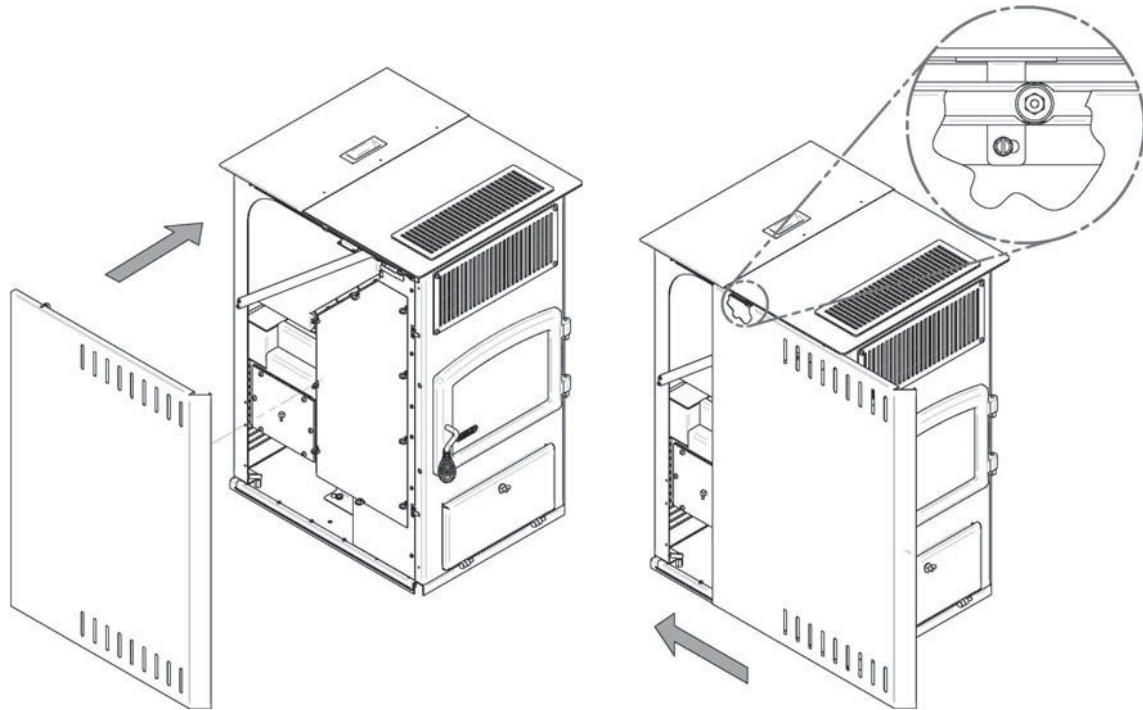


Step 5:

Put back in place the side panel by sitting down the bottom on the lower track first, and then push it to the vertical. Align the rear bearing through the circular opening in the top sliding track and push the side panel toward the back.


**Right cleanout panel gasket****Step 1:**

Slide the right side shield about 10" toward the front. Align the rear bearing through the circular opening in the top sliding track in order to remove the side shield by pulling it back.

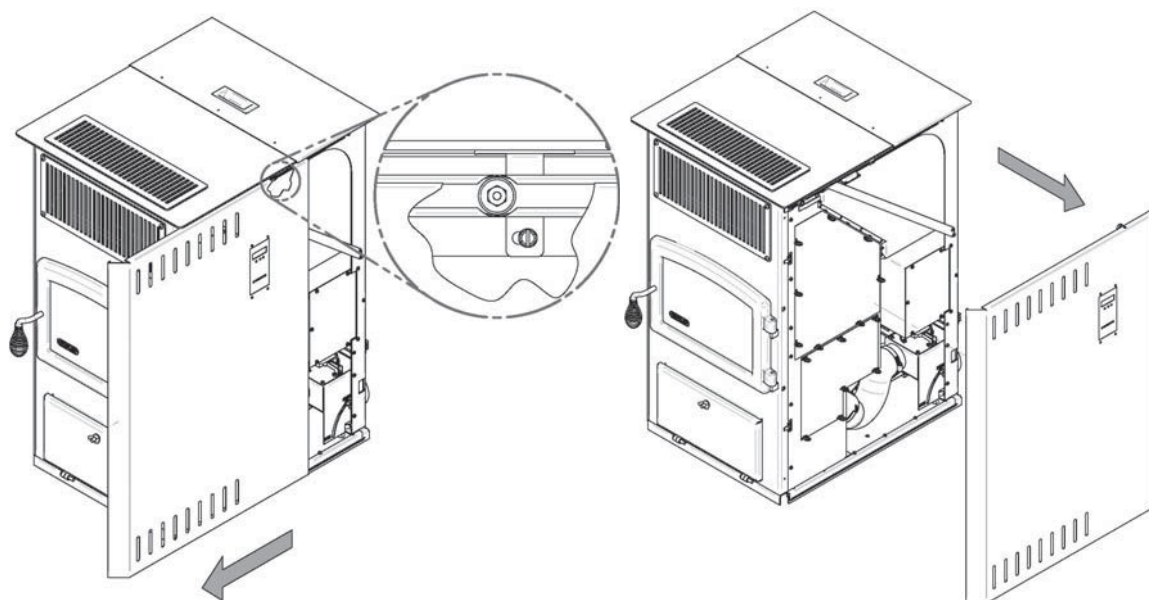

Step 2:

Remove the upper air jacket access panel by untying the 8 spring clips.

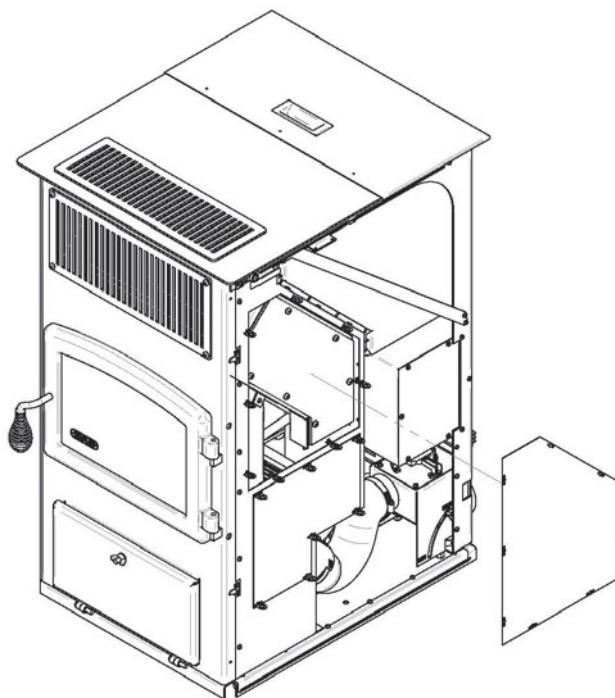**Step 3:**

Remove all 6 bolts retaining the right cleanout panel. Remove the worn gasket and clean-up the contact surfaces. Clean-up the dirty area inside the appliance with an ash vacuum. Apply gasket #21349 from AC09190 on the cleanout panel. Put back in place the cleanout panel with its respective bolts.

