

## INSTALLATION & OPERATION MANUAL

*Thank you for purchasing this product from a fine line of heating equipment.  
We wish you many years of safe heating pleasure.*

Visit our web site at [www.englishstoveworks.com](http://www.englishstoveworks.com) for helpful information, frequently asked questions, parts & accessory orders and more.

**NOTE: IF YOU HAVE A PROBLEM WITH THIS UNIT DO NOT RETURN IT TO THE DEALER. CONTACT CUSTOMER SERVICE @ 1-800-245-6489.**

### ***Please note the following Precautionary Statements:***

**CAUTION:** This unit must be installed in accordance with these instructions and must comply with local building and fire codes. Failure to do so could result in a chimney or house fire, property damage, bodily injury or even death.

England's Stove Works highly recommends the use of smoke detectors and Carbon Monoxide detectors with any hearth product, including this unit. Follow all manufacturer's instructions when using smoke or Carbon Monoxide detectors.

Keep children, furniture, fixtures and all combustibles away from any heating appliance.

Maintain a minimum clearance of thirty inches (30") from the firebox and eighteen inches (18") from the flue pipe to any combustible. This can be reduced to six inches (6") by using a heat shield and double wall or shielded pipe.

This product contains a catalytic combustor, which needs periodic inspection and replacement for proper operation. It is against the law to operate this wood heater with the catalytic combustor removed, deactivated or in a manner inconsistent with the operating instruction in this manual.

*Our catalytic stoves are designed to burn seasoned, dry wood.*

**THIS STOVE IS NOT MOBILE HOME APPROVED.  
DO NOT PLACE IN A MOBILE HOME!**

## **24-ICD, 50-SHW25 and 50-TRW25**

### **COMPLIANCE STATUS**

Type of Fuel	Wood
Emission Rate	2.4 Grams/Hour
Tested Overall Efficiency	83.78%
EPA Certificate Number	443
This unit is certified to EPA phase II standards.	

Revised 11/07



## SAFETY NOTICE:

**IF THIS UNIT IS NOT PROPERLY INSTALLED, A HOUSE FIRE MAY RESULT. FOR YOUR SAFETY, FOLLOW THE INSTALLATION DIRECTIONS. CONTACT LOCAL BUILDING OR FIRE OFFICIALS CONCERNING RESTRICTIONS AND INSTALLATION INSPECTIONS IN YOUR AREA.**

## SECTION I: FLUE SYSTEM

**CAUTION:** Follow the pipe manufacturer's installation instructions and directions for passing through combustible walls and ceilings. Check local codes in your area.

### A. Existing Flue System

This is a freestanding unit and is designed to connect to an existing flue system, such as masonry or a pre-manufactured Class A flue system. If you have a masonry system, the inner liner should be inspected very carefully for cracks; if there is no liner in your chimney, we recommend you install one or have a stainless steel liner installed. If you have an existing stainless steel liner it should be inspected to ensure there is no buckling, warping or cracks in the system.

Either type chimney should be thoroughly cleaned before installing the new unit. We strongly recommend that you have a qualified chimney sweep do the inspection and cleaning. The sweep can spot problems that you might overlook, and at the same time advise of any required changes. In most cases the sweep can make any necessary changes or at least recommend qualified people to do so. **Note: It is not permissible to connect this unit to a chimney that serves another unit.**

### B. Flue Size

The proper flue size is determined by the inside diameter of the flue collar on the unit. This unit comes with a six inch (6") Top or Rear exhaust flue collar. The connector pipe should be at least six inches (6") or larger and never smaller than the collar; the area of the chimney must also be equal to or greater than the area of the flue collar. If the area of the flue is greater than the area of the collar, it should not be more than three (3) times greater.

Example: The area of a six inch (6") flue collar is 28.87 square inches, therefore the area of the connector pipe should be at least 28.87 square inches and never more than 84.8 square inches.


### C. Top or Rear Exhaust

This stove comes with an adaptable top or rear exhaust system. The unit is packaged at the plant with the top exhaust system but can be changed by switching the parts; if you switch to a rear exhaust be sure the gaskets are in place and all the bolts are tight. The connector pipe should be 24-gauge steel pipe and inserted (crimped end) into the flue collar. This will reverse the pipe and keep any creosote inside the connector pipe.


**\*IMPROPER INSTALLATION:** The manufacturer will not be held responsible for damage caused by the malfunction of a stove due to improper venting or installation. Call (800-245-6489) and/or consult a professional installer if you have any questions.

*Note on Outside Air Hookup:* You can use an outside air hookup with our catalytic stoves. We highly recommend it for homes built since the more air-tight construction standards went into effect. This involves connecting a metal pipe (usually three inches (3") in diameter - check your stove - and the pipe can be flex or rigid) from the air inlet located on the bottom rear of the stove through your floor or wall. The outside end of this pipe should be covered in some manner to keep it clear of foreign matter.

**INSTALLATION OF 24-ICD & 50-SHW25  
U.L. APPROVED PRE-MANUFACTURED CHIMNEY**

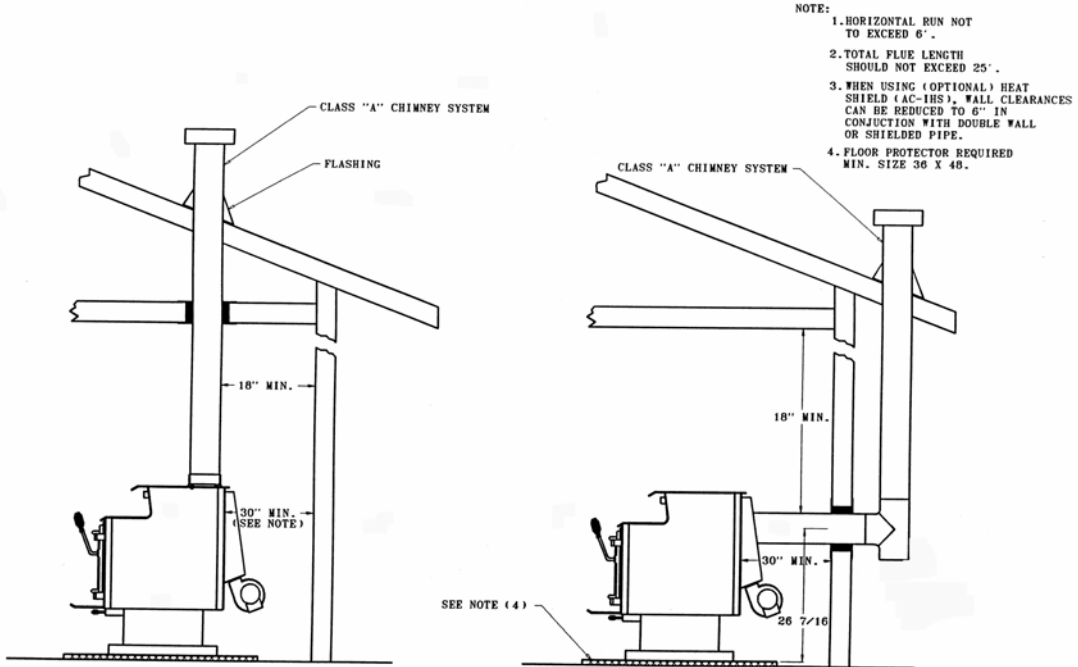

**INSTALLATION OF 24-ICD & 50-SHW25  
USING A MASONRY CHIMNEY**

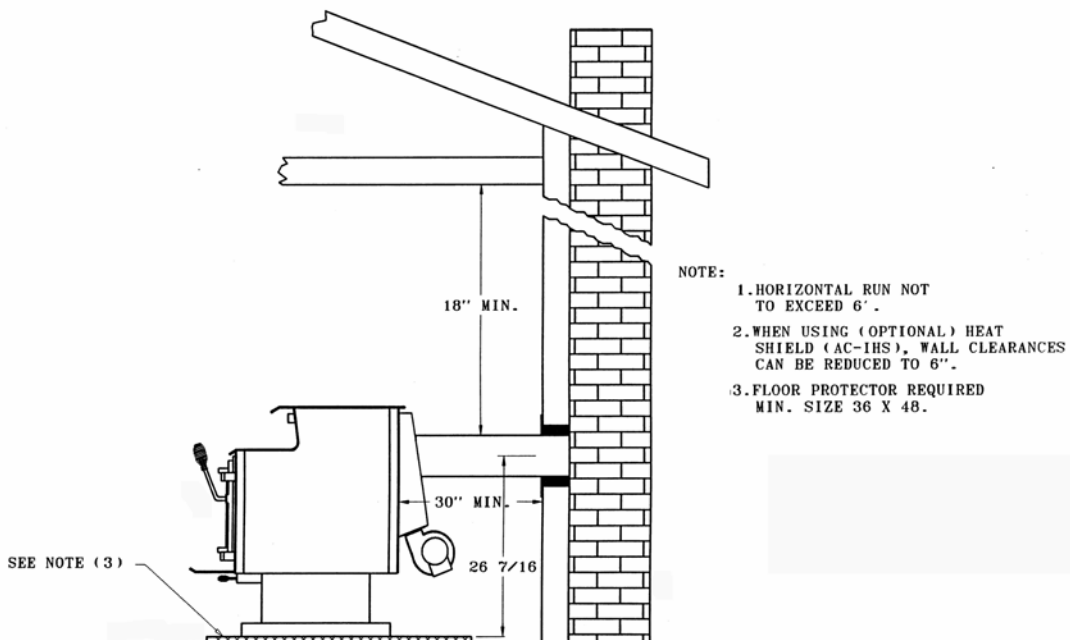

## D. Installation of a New Flue System

### 1. Masonry Flue:

Most masonry flue systems are on the outside wall of the house and extend upward against the outside wall. The flue thimble is on the inside wall and makes the connection with the vertical flue and your stove flue pipe. You must maintain the proper clearance between the connecting flue pipe and any combustibles; if your chimney has a clean-out door, it is necessary this door be airtight. All the combustion air should be pulled through the stove and not through the clean-out, pipe seams or any other place.

If you are planning to build a masonry flue system, we highly recommend you hire a professional, as he will be more familiar with local building and fire codes. It is your responsibility to ensure the chimney or flue system is in safe operating condition. The manufacturer will not be responsible for an accident attributed to a faulty chimney.

### 2. Pre-Manufactured Flue System:

This type system has become very popular because it is very easy to install and is very safe when installed correctly. In making your choice be sure the system has a recognized label of approval such as U.L., B.O.C.A. or I.C.B.O. -- any of these approvals will assure the flue system is constructed of the proper materials and meets the required safety standards. Your local dealer will normally handle a top grade approved flue pipe.

There are two very popular methods of installing a pre-manufactured flue system. The first and least expensive is through the ceiling and out the roof -- this is the most direct route, requires fewer pipes and creates a better draw. It is less expensive not only because less pipe is required, but also because double wall pipe is only required from the ceiling through the roof. Single wall 24 gauge pipe is used from the stove up to the ceiling. The second method is to go through the wall and up the outside of the house. This method is more expensive, because it requires insulated pipe through the wall and up the outside of the house; in either type of installation you should be careful, as proper clearances to combustibles are very important. You can consult with your local dealer for information on a qualified contractor or installer. It your responsibility to ensure the flue system is safe and in good operating condition. The manufacturer will not be responsible for an accident attributed to a unit connected to a faulty flue system.

## SECTION II: FLOOR AND WALL PROTECTION

### A. Floor Protection

You will not need any floor protection if your floor is constructed of a non-combustible material such as brick or concrete. If your floor is made of a combustible material such as hardwood, carpet or linoleum, you must have protection between the stove and the floor. Any stove board that is purchased should be U.L. listed and rated. This stove will require a minimum board size of 36" x 48" for the floor. The approved protector should be large enough to provide eight inches (8") behind the unit, eight inches (8") on each side and sixteen inches (16") in the front of the stove.

**Note: Flue systems and flue pipe are not furnished with the unit. They must be purchased separately.**

## B. Wall Protection

This stove's normal clearance to a combustible such as paneling, wallpaper or drywall is thirty inches (30"). You should check local codes for clearances to combustibles, as some areas require more than thirty inches (30"). If you need to place your unit closer than the required minimum, a wall board or heat shield can be used. Installing a wall board with a one inch (1") air space (between the wall and the board) will reduce your clearance by 2/3 or to twelve inches (12"). The wallboard must be only six inches (6") higher than the top of the unit. In moving the unit closer to the wall, the connector pipe may be closer than eighteen inches (18") and in this case shielded or double wall pipe will have to be used. This will allow your pipe to be six inches (6") from a combustible.

## C. Heat Shield

The AC-IHS (SH-HS25) Side and Rear Heat Shield is a two-piece shield that attaches to the rear of the unit. When attached to the stove it covers the back of the unit and approximately twelve inches (12") on each side. This allows six inches (6") clearance from the rear; however, thirty inches (30") will be required in the area the shield does not cover. When using the heat shield you will be required to use shielded or double wall pipe, as it will be less than eighteen inches (18") from the wall. (NOTE: You **must** use the top vent option of your unit with the use of this heat shield.)

## SECTION III: PLACEMENT AND INSTALLATION

All of our units are well constructed and very heavy, so you must take caution getting the stove into your home. You can remove the door and the firebrick to make the unit lighter, but *make a note of the brick layout before removing them*. Never try handling this product alone!!! We recommend using a handcart on any heating appliance.

### Chimney Connector Pipe

The 24-gauge black steel connector pipe for this unit must be six inches (6") in diameter. Do not use pipe that is galvanized or aluminum, as it will not withstand the extreme temperatures of a wood fire, and do not use chimney connector pipe (single wall) as a chimney. In this application, triple wall or packed pipe is required. The connector pipe should have the crimped end inserted into the flue collar, which will reverse the rest of the pipe. This will allow any creosote that is formed in the pipe to stay inside the pipe and stove.

For proper operation, the chimney pipe should be as short as possible and have an upward slope of one-fourth inch (1/4") per foot to the thimble. It is required that you keep an eighteen-inch (18") clearance from your pipe to combustible surfaces such as the wall or ceiling. If your installation is less, it will require the use of double wall or shielded pipe.

**IMPORTANT SAFETY NOTE:** If the unit or chimney connector pipe "glows" red (or white), the stove is over-fired. This condition could cause a house or chimney fire. Do not operate your unit too hot, or over-firing may result (see "Operating Instructions" section of manual).

## **SECTION IV: ACCESSORY ITEMS**

### **AC-101/SH-101 Brass Trim**

There are three (3) pieces of J-channel trim in this kit that snap onto the two top edges of the unit and the ash apron edge. Remove the protective cover from the trim and match it to the corresponding edge of the stove -- the trim simply slips over the corresponding edge of the unit. If required, high temperature silicone can be used on the inside of the trim.

### **AC-01 Brass Knobs (Per Set)**

The brass knobs have a wide base and sit on the top of the stove.

### **AC-02 Brass Rail**

This accessory is pre-mounted on a metal base and sits on the top of the stove.

### **AC-IHS/SH-HS25 Side and Rear Heat Shield**

This accessory is a two piece heat shield that is installed to the rear of the stove and will give six inches (6") clearance to a combustible. The shield is attached one piece at a time, with the bolts mounting to the four weld nuts on the rear of the stove. This heat shield will allow six inches (6") clearance from the rear of the unit; however, the thirty inches (30") clearance to a combustible will still be required on the sides. The flue pipe must be shielded or double wall if it is less than eighteen inches (18") from a combustible.

NOTE: You **must** use the top vent option of your unit with the use of this heat shield.

## **SECTION V: OPERATING INSTRUCTIONS**

### **A. Building a Fire**

Your new stove is equipped with a catalytic combustor, which requires the following start-up procedure. Inspect your unit to ensure the combustor is well seated in the combustor housing.

**CAUTION: ALWAYS PULL OUT THE BY-PASS DAMPER COMPLETELY BEFORE OPENING THE FRONT DOOR. NEVER LIGHT YOUR FIRE WITH GASOLINE, KEROSENE, DIESEL FUEL OR CHARCOAL LIGHTER FLUID; THIS COULD BE VERY DANGEROUS.**

**NOTICE: Your new stove and the connector pipe may smoke for a short period of time. This is called "cooking out" and is no cause for alarm. During the first few hours of operation, it is a good idea to open some doors and windows.**

1. Be sure there are no combustible materials in the immediate area of the stove.
2. Pull out the slide damper located under the ash lip and the by-pass damper located on the top right side of the unit.

3. Place several wads of crushed newspaper over the entire bottom of the firebox.
4. Lay small dry sticks of kindling on top of the paper.
5. Ignite the paper. Leave the door cracked until the kindling is burning freely -- approximately ten to fifteen (10 to 15) minutes.
6. Once you have established a hot bed of coals, open the door and add a few pieces of dry split wood. Leave the door cracked and allow the unit to burn for approximately thirty (30) minutes. After this time, more split wood can be added.
7. The final step is to close the by-pass damper and place the slide damper (located under the ash apron) to your desired setting. Note: Pulling the slide damper out will increase the amount of combustion air and allow a faster burn.

NOTE: It is very important the above procedure be followed to ensure the catalytic combustor reaches the proper temperature. It is recommended the combustor be operated at 700 to 1400 degrees Fahrenheit; the combustor must be 500 degrees Fahrenheit or above before it will accept the smoke fumes. Operating the unit above 1800 degrees will damage the combustor, although temperatures between 1400 and 1600 degrees are common. If minor-build up is evident on the combustor, run the unit at a high rate and leave the by-pass damper partially open to help clean the combustor. A one fourth inch ( $\frac{1}{4}$ " ) button plug is located on the top left side of the stove. This plug can be removed and a Condor probe thermometer (Part #AC-13) inserted, which will display the actual temperature of the combustor. This part can be ordered by your local dealer or from the factory.

## **B. Draft Control**

This unit has a slide draft control located under the ash apron, which is used to regulate the amount of combustion air. This controls the amount of heat the stove produces, as well as the burn time. The more you open the draft by pulling out the handle, the more combustion air enters the firebox; this will cause the stove to burn hotter and faster. You will have to experiment with your unit for the most efficient setting, as no two chimneys are the same. If you have problems regulating the unit please call your dealer or the factory.

## **C. Do Not Over-Fire Your Stove**

Burning flammable liquids, too much wood and trash in the stove can result in over-firing. If the chimney pipe turns red or even worse, white, the unit has been over-fired. This may ignite creosote in the chimney and possibly cause a house fire. If this does happen, immediately close the slide damper by pushing it in completely and close the by-pass damper. Get out of the house and call the fire department. A chimney fire may cause structural damage to the chimney system, therefore do not use the stove until the entire flue system is inspected and, if necessary, repaired or replaced. A chimney sweep can perform this inspection.

## **D. Everyday Fueling**

This unit is designed to burn eight to ten (8 to 10) hours on one load of firewood. Always open or pull out the by-pass damper before opening the stove door. The door should be cracked for five to ten (5 to 10) minutes to allow the excess smoke to clear through your flue system.

Once you have opened the door properly, you should have a bed of hot coals in the bottom of the firebox. With the use of a poker, pull the bed of hot ashes towards the front door of the unit, then fill the stove with seasoned wood and burn the unit for approximately thirty (30) minutes with the door cracked. The next step is to close the door and the by-pass damper and set the front slide damper to your desired burn. Follow this procedure each time you fuel your stove.

## **E. Ash Removal and Disposal**

Regularly inspect the ash build-up in your stove and remove as necessary. Ashes should be placed in a metal container with an airtight lid. Pending disposal, they should be placed on a non-combustible surface completely away from any combustible material. The ashes should be retained in the closed container until all cinders have thoroughly cooled. Note: It is essential that your flue system be checked for creosote build-up at least twice per month.

## **SECTION VI: CARE AND MAINTENANCE**

### **A. Catalytic Combustor Maintenance**

*Note* – Your unit will have a 3” thick, 25-cell combustor (manufactured by Applied Ceramics), **or** it will have a 1” thick, “ceramic foam” type combustor (manufactured by Clear Skies). The following instructions apply to both types, unless otherwise specified.

1. To reach the combustor, first take out the Flame Impingement Plate by removing the four (4) 3/8” brass nuts (they take a 9/16” wrench). Once the nuts are removed the plate should drop from the four bolts. This will allow you to see the bottom of your catalytic combustor.
2. *For 25-cell Applied Ceramics combustor:* If the combustor is plugged up you will see black soot within the cells on the bottom side of the ceramic piece. This can usually be removed by brushing the combustor with a soft bristled brush. You can also run a pipe stem cleaner through each cell for removal of any internal build-up. This type of cleaning can be done without removing the combustor from the stove.  
*For 1” thick Clear Skies combustor:* Follow the instructions provided by Clear Skies pertaining to the cleaning of their combustor.
3. Combustor Housing (Part #CA-1710) – This cast iron housing holds the combustor in place and if it becomes cracked or broken it should be replaced (See Catalytic Combustor Replacement”).
4. Flame Impingement Plate (Part #IP-24AC) - These units are equipped with a flame impingement plate designed to keep the flames from directly hitting the combustor, which also aids in heating up gases before they reach the combustor. If this plate becomes distorted, it should be replaced (See Step 1, above).
5. The catalytic combustor (Part #AC-6C3) is guaranteed by Applied Ceramics or Clear Skies, the manufacturers. A separate warranty card will be in the manual for this part and should be mailed back to the combustor manufacturer. Both combustors are equivalent, and in the event there is a problem with this item, the manufacturer should be contacted as listed:

Applied Ceramics  
Customer Service Dept.  
P.O. Box 29664  
Atlanta, GA 30359  
(1-770-448-6888)

Clear Skies Unlimited, Inc.  
11208 Cochiti SE  
Albuquerque, NM 87123  
(1-505-237-9519)

## **B. Gaskets**

This unit comes with a gasket around the door, which should be replaced every two years. To replace the door gasket (Part #AC-DGKNC) the old gasket must first be completely removed. This may require you to scrape the channel free of old gasket and adhesive prior to adding the cement and new five-eighth inch (5/8") rope gasket. After attaching the new gasket the door should be closed and latched for twenty-four (24) hours to allow the cement to harden.

If you are replacing the window gasket (Part #AC-GGK), the gasket already has adhesive on one side. Remove the paper on the adhesive side and place it around the outside edge of the glass --forming a "U" with your fingers and running it around the outer perimeter does this. The door and glass gasket can be ordered from your dealer or directly from the factory (PARTS ORDERS ONLY dial 800-516-3636).

## **C. Firebrick (Part #AC-SB & AC-LB)**

This stove is equipped with high density, high temperature firebrick. If the brick becomes chipped or cracked, especially on the sides of the firebox, it should be replaced. This stove requires fifteen large brick and ten small brick. These items can be ordered from your dealer or from the factory.

## **D. Finish (Part #AC-MCSP)**

Your stove has been painted with 1200 degree Metallic Charcoal paint that will retain its original appearance for years. If your stove should get wet, some rust spots may appear -- these can be removed with plain steel wool and touched up with new paint. We recommend using our paint as others may not be able to withstand the high surface temperatures. This item can be ordered from your dealer or from the factory.

## **E. Blower System**

This unit has a four-tube blower system, which consists of a manifold welded into the top of the unit. At the rear of the stove is a blower duct where the room air blower (Part #AC-16) attaches. This blower is a squirrel cage type motor with bearings that will require some lubrication; prior to each season it is a good idea to oil the bearings through the openings on each end of the motor housing. Any lightweight type household oil can be used for this procedure.

## **F. Glass Cleaning**

Depending on the type wood and the mode in which you are operating the unit it may be necessary to clean the glass several times per week. Let the stove cool down, then clean the glass with a stove glass cleaner or a solution of ammonia mixed with water.

You may order parts and options on our web site: [www.englishstoveworks.com](http://www.englishstoveworks.com),  
or by calling (800) 516-3636

## **SECTION VII: CHIMNEY AND FLUE PIPE MAINTENANCE**

### **A. Chimney Maintenance**

Many stove owners prefer to clean their own chimneys; however, *we highly recommend a chimney sweep be contacted to do this job.* A professional sweep can clean and inspect your system and sometimes find problems that you may overlook.

### **B. Flue Pipe Maintenance**

Your pipe should be inspected monthly and cleaned at least once per year. Most people will clean their pipe and stove at the end of the heating season, which will eliminate odors from entering the house during the summer months. The flue pipe must be replaced every three to five years, depending on the thickness of the pipe (thicker pipe will last longer).

## **SECTION VIII: THINGS THAT COULD CAUSE YOUR STOVE TO SMOKE**

It is very important that installation be made airtight. This is best accomplished by using stove cement at each pipe joint, where the first section enters the stove flue collar and at any other connection such as the flue thimble. Any existing air leaks will cause air to draw into the system at the point of least resistance -- such areas are pipe joints, flue thimble, flue openings in the chimney, ash clean-out doors and cracks in the chimney. These areas may cause air to enter the system and not be drawn through the stove, which could result in a cool chimney, causing the smoke to build up in the flue and eventually come back into the house. This is called "back puffing" and can be corrected by sealing all troublesome areas so they are airtight.

Another problem is a downdraft in the flue system. Air currents being deflected down the chimney by nearby objects such as trees, buildings or a hill can cause this. The other cause is that flue gases chill too quickly as they pass through the chimney system. This will cause the gases to become heavy and back up in the system, which will often result in "back puffing," poor combustion and smoke odors in the house. Burning the unit hotter will, in some cases, help this situation. If you have any problem of this nature with your flue system, contact your local dealer or call Customer Service at (800) 245-6489.

## **SECTION IX: WHAT CAUSES CREOSOTE?**

Creosote is caused by the condensation of the vapor that exists in the escaping smoke -- the moisture level of your fuel will determine the density of this vapor. A severe downdraft as discussed previously will cause creosote. Moisture will form at the coolest point in your chimney system and at this point will tend to build creosote. The ash is picked up by the moisture in the system and will build up or run back down the inside of your flue. This situation can sometimes be helped by installing an "open vented" type chimney cap, which will allow the chimney to maintain a higher temperature to create a better draw and keep some wind currents from entering the system. This cap will not correct a poorly constructed chimney or one in bad need of repair, however -- some chimneys may have to be relined or even rebuilt.

*Have this information on hand if you phone the factory or your dealer regarding this product.*

Retain for your files:

Model Number \_\_\_\_\_

Date of Purchase \_\_\_\_\_

Date of Manufacture \_\_\_\_\_ Serial # \_\_\_\_\_

## **LIMITED 5 YEAR WARRANTY FROM THE DATE OF PURCHASE TO THE ORIGINAL OWNER**

The manufacturer extends the following warranties:

**Five Year Period:**

1. Carbon steel and welded seams in the firebox are covered for 5 years against splitting.
2. The cast iron door, hasp and hinges are covered for 5 years against cracking.

**One Year Period:**

3. Component parts such as combustor housing, flue collar, flame impingement plate, baffle plate, brick retainers, combustor plate and fasteners are covered for 1 year against cracking, breakage and welded seams from separating.
4. Electrical components, accessory items, firebrick, glass and the painted surface are covered for 1 year from the date of purchase.

**Conditions and Exclusions:**

**Damage from over-firing will void your warranty.**

**This warranty does not apply if damage occurs because of an accident, improper handling, improper operation, improper installation, abuse, or unauthorized repair made or attempted to be made.**

**The manufacturer is not liable for indirect, incidental, or consequential damages in connection with the product including any cost or expense providing substitute equipment or service during periods of malfunction or nonuse.**

**All liability for any consequential damage for breach of any written or implied warranty is disclaimed and excluded. Some states do not allow the exclusion or limitations of incidental or consequential damages, so the above may not apply to you.**

**Procedure:**

**Purchaser must give notice of claim of defect within the warranty period and pay transportation to and from a service center designated by the factory. The dealer from which the unit was purchased or the factory, at our option, will perform the warranty service.**

**Other Rights:**

**This warranty gives you specific legal rights, and you may also have other rights, which may vary from state to state.**

**NOTE: THIS WARRANTY IS NULL AND VOID IF YOU DO NOT RETURN THE ATTACHED WARRANTY REGISTRATION WITH A COPY OF THE SALES RECEIPT WITHIN 30 DAYS FROM THE DATE OF PURCHASE.  
WARRANTY IS NOT TRANSFERABLE.**

## **REPLACEMENT PARTS LIST**

AC-110	Brass Window Trim
AC-111	Brass Door Trim
AC-16	100 CFM Blower Variable Speed Blower
AC-DGKNC	Door Gasket Kit
AC-FGKC	Flue Collar Gasket Kit
AC-SB	Small Brick (10 Brick on Bottom of Unit)
AC-LB	Large Brick (15 Brick on Sides and Back of Unit)
AC-6C3	Catalytic Combustor
AC-MCSP	Metallic Charcoal Paint
CA-1710	Combustor Collar
CA-20	6" Flue Collar (Includes Gasket and Hardware)
CA-22	6" Blank (Includes Gasket and Hardware)
IP-24IC	Flame Impingement Plate

### **OPTIONS:**

AC-101/SH-101	Brass Lip Trim
AC-IHS/SH-HS25	Rear and Side Heat Shield

(NOTE: You **must** use the top vent option of your unit with the use of this heat shield.)

All replacement parts can be ordered from the factory (Parts Orders: 800-516-3636), or from our web site: [www.englishstoveworks.com](http://www.englishstoveworks.com) .

*If you have any questions or problems contact the Customer Service Department.*

**Customer Service Department**     [service@englanderstoves.com](mailto:service@englanderstoves.com)  
**P.O. Box 206**                      **Parts Orders ONLY: (800-516-3636)**  
**Monroe, VA 24574**     **Questions: (800-245-6489) (Fax: 434-929-4810)**

# WARRANTY REGISTRATION for England's Stove Works

Purchased by (Name) \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Telephone \_\_\_\_\_

Email Address \_\_\_\_\_

## **DEALER INFORMATION**

Purchased From (Dealer) \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

## **UNIT INFORMATION**

**(Please be sure to refer to sticker on back of manual or box to complete this section)**

Model Number \_\_\_\_\_ Purchase Date \_\_\_\_\_

Purchase Price \_\_\_\_\_

Serial Number \_\_\_\_\_ Mfg. Date \_\_\_\_\_

*How did you first hear about our product? (please check one)*

Word of Mouth       Burn Trailer Demonstration       Internet

Other: \_\_\_\_\_

*Where did you receive information about our product? (please check one)*

Rec'd. info. via phone       Dealer (Name of dealer): \_\_\_\_\_

Internet      Other: \_\_\_\_\_

### **IMPORTANT NOTICE**

**THIS REGISTRATION INFORMATION MUST BE ON FILE FOR THIS WARRANTY TO BE VALID.  
PLEASE MAIL THIS INFORMATION WITHIN THIRTY (30) DAYS FROM THE DATE OF PURCHASE.**

Mail To:

England's Stove Works, Inc.  
Customer Service Department  
P.O. Box 206  
Monroe, VA 24574

Or, Fax To:

(434) 929-4810 – 24 hours a day

Or, now available – Go online to complete your Warranty Registration!

Visit [www.englishstoveworks.com](http://www.englishstoveworks.com) if you prefer to register online.